


Mini PC

Model: SIM-M53



| A*B*C :197.5 mm*127 mm*47.5 mm | | | | |
|--------------------------------|---|-----------------|---|--------------------|
| I/O | ① | POWER | ② | USB3.0*2 |
| | ③ | USB3.0*2 | ④ | RESET |
| | ⑤ | TYPE-C | ⑥ | 1/8"SPK & 1/8" MIC |
| | ⑦ | RS232 COM | ⑧ | RS232 COM |
| | ⑨ | RS485 COM | ⑩ | RS232 COM |
| | ⑪ | USB2.0*2 | ⑫ | Giga RJ45 LAN*2 |
| | ⑬ | VGA | ⑭ | HDMI |
| | ⑮ | DP | ⑯ | DC12V input |
| | ⑰ | Grounding Screw | | |

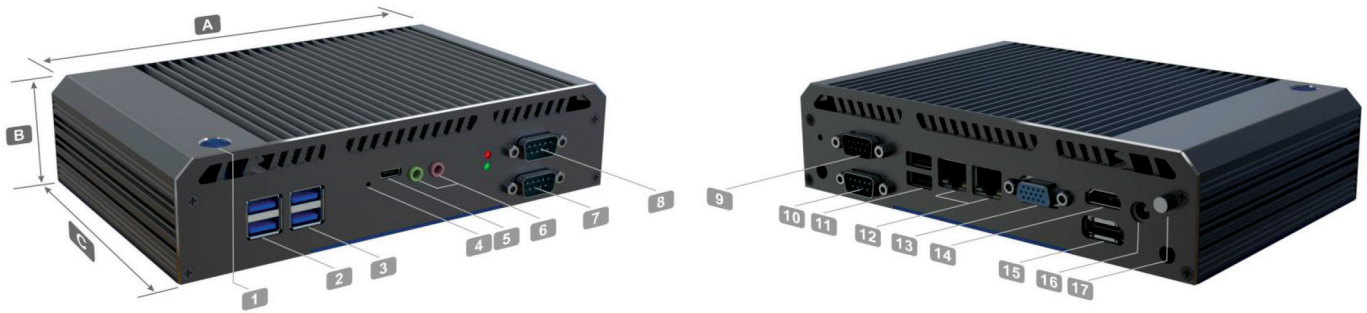

simava.com
021-41352000
43391(Call center)



PARAMETER LIST

| | |
|------------------|---|
| CPU | Intel core i3-5005u |
| Frequency | 2.0GHz |
| Cores/Threads | DUAL core 4 threds |
| Cache | 3 MB |
| Graphics | Intel® HD Graphics 5500 |
| Chipset | Broadwell |
| Hyper- Threading | Yes |
| RAM | Max 16GB 2×SODIMM DDR3L 1333 MHz/1600MHZ |
| Storage | SSD/HDD 1×mSATA pcie 1×2.5" SATA |
| Display | 1×HDMI 1.4 1×VGA 1×DP |
| TDP | 15W |
| Network | 2×Ethrnnet 10/100/1000M Adaptive |
| Extendable | WIFI+BT (Optional) |

BIOS

| | |
|----------------|---------------------------------|
| Virtualization | VT-D / VT-X |
| Boot Mode | Power On / PXE /Wake - on - LAN |
| OS Supporte | Windows (Not include XP)& Linux |

Environmen

| | |
|-------------------------|--|
| Working Temperature | -10 °C ~ 60 °C |
| Environment Temperature | -20 °C ~ 70 °C |
| Operating Humidity | 5% - 85% (non-condensing) |
| Static | Direct Contact : 2k,Air Discharge : 6k |
| Operating Voltage | 12v – 5A |
| Optional Braket | VESA Mount |
| Radiation Method | Passive Cooling |



simava.com
021-41352000
43391(Call center)

